

# Product Guide





# Welcome to Easy-Trim

The roofing and construction industry is fast paced and growing rapidly. Easy-Trim Roofing and Construction Products Ltd is both a manufacturer and distributor of the ultimate range of roofing, construction and consumable products to the industry.

Based in Altham, Lancashire, the company was founded in 2005 and has since gone from strength to strength, becoming one of the fastest growing manufacturers in the UK roofing sector. We offer innovative products of unparalleled quality and have a reputation for customer service second to none.

Now a multi-award winning company, we have made significant investment in our production facilities and in the development of our people. We strongly believe that quality, availability, reliability and innovation in the future will be derived from British Manufacturing. Easy-Trim hold industry recognized certifications and accreditations amongst which is ISO 9001- providing confidence in our product range and demonstrating our commitment to continual improvement and development.

We supply everything for the roof all under one roof. Inclusive of Underlay's & VCL's, Easy-Trim Roto Roof Windows, Dry Fix Ridge, Dry Fix Verge, Lead Replacement, Ventilation, Liquids, Bituminous Membranes, Insulation and Sealants. We aim to deliver the widest range of products of the highest quality.

























Manufacturing Business of the Year & High Growth Business of the Year



Dry Ridge		Weatherproofing	
Ridge F and Accessories	1	Fiba-pol	27
Ridge F Plus and Accessories	3	Bitumen Trowel Mastic	28
		Cold Gritting Solution	28
Dry Verge		Bitumen Paint	29
Dry verge		Bitumen Primer	29
Verge U and Accessories	5	Felt Adhesive	30
Verge C and Accessories	7	Solar Reflective Paint	30
		All Weather Compound	30
Membranes			
Breather Membranes	9	Maxi-Torch	
Moisture Absorbent Membranes	12	Maxi-Torch APP Torch-On Membranes	04
Non-Breathe Membranes	13		31
		Maxi-Torch SBS Torch-On Membranes	33
Insulation		Maxi-Torch 3B Pour and Roll  Maxi-Torch Guarantees	35 25
		Maxi-Torch Guarantees	35
Cavity Closers	15		
Ventilation		D-Torch	
vermanori		D 0000 T I I O M	
Over Fascia Vents	16	D-2000 Torch-On Membranes	37
Continuous Rafter Tray	17	D-3000 Torch-On Membranes	40
Felt Suport Trays (inc 2-in-1 and 3-in-1 Felt Support Trays)	17	D-Torch Guarantees	41
Eaves Comb	17		
Circular Soffit Vents	18	Artificial Turf	
Weep and Peep Vents	18		
Eaves Protection Strip	18	Easy-Trim Artificial Turf	42
Tile Vents and Accessories	19		
		Roof Windows	
Lead Products		Easy-Trim Roto	43
Lead Replacement	21		
Lead Accessories	23		
		Additional Support	45
Slate Accessories		The App	46
Slate Repair Hooks	23	Delivery	47
Ciate Hepail Hours		Our Responsibility	47
Liquid Roofing			

24

PolyureCoat



# Ridge F

All the components are of high quality and manufactured to make installation quick and simple.

- · Ventilated ridge roll with pumped butyl for a quality seal
- Universal ridge unions compatible with almost all ridge tiles
- · Super strength nylon "ratchet" clips give superior strength & durability
- · Mortar free
- · Resistant to wind and water
- Vapour permeable
- Simple installation requires no special tools
- Self-adhesive butyl strip provides a water tight seal & permanent bond
- High quality stainless steel fixing packs to ensure durability and long service life
- 20 year guarantee on all components

### Suitable for

- Concrete and clay ridge tiles
- Most slate and tile profiles

# Available in 3m, 6m and 10m kits

# **Product Colours**







### Kit Contents



### Ridge Roll

- Manufactured from a polypropylene hydrophobic mesh that allows the roof to breathe whilst repelling water
- A central white fabric strip along the centre of the roll enables accurate installation ensuring a neat and aesthetically pleasing ridge line
- Corrugated aluminium allows a constant 5mm of ventilation
- A pumped butyl self-adhesive strip allows a watertight permanent bond without compromising the integrity of airflow



### **Ratchet Clips & Battens**

- Manufactured from glass filled nylon for superior strength and durability
- Adjustable outer clips ensure our kits are suitable for use with clay tiles



### Unions

- Film grade polypropylene material for durability and flexibility will not weaken when 'flexed'
- Incorporates uniquely designed tracks to divert any penetrating rainfall away from the ridge

BOX

PALLET

### Did you know?

We also sell a Hip Accessory Kit which is to be used in conjunction with Ridge F kits.

See page 2 for codes and pricing.



### Ridge Kits



PRODUCT CODE	DESCRIPTION	QTY	QTY
EASYRIDGE3MTR	RIDGE F BLACK 3M DRY FIX RIDGE KIT	Singles	90
EASYRIDGEFBLK	RIDGE F BLACK 6M DRY FIX RIDGE KIT	Singles	80
EASYRIDGE10MTR	RIDGE F BLACK 10M DRY YFIX RIDGE KIT	Singles	60
EASYRIDGE3MTR/T	RIDGE F TERRACOTTA 3M DRY FIX RIDGE KIT	Singles	90
EASYRIDGETERRA	RIDGE F TERRACOTTA 6M DRY FIX RIDGE KIT	Singles	80
EASYRIDGE10MTR/T	RIDGE F TERRACOTTA 10M DRY FIX RIDGE KIT	Singles	60
EASYRIDGE/CLAY	RIDGE F BLACK 6M DRY FIX CLAY RIDGE KIT	Singles	80



# Accessories



### **Hip Accessory Pack**

We also sell a Hip Accessory Kit which is to be used in conjunction with Ridge F kits. Accessory kit contains:

- Short & long leg ratchet clips
- Cut tile fixing clips
- Hip Trays (sufficient to run along a 6m hip)

		BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
EASYRIDGE/HIPKIT	RIDGE F HIP ACCESSORY KIT	Singles	60



Made from PVC, our hip trays are 1.2m in length by 250mm wide. Fitted above the Ridge Roll, they are

designed to provide an even, level run to the hip of a roof.

designed to provide an ever	i, lever full to the hip of a roof.	BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
HIPTRAY/1.2	HIP TRAY 1.2M	Singles	1000



### **Hip Clip Pack**

The hip clip has been designed to secure the cut single lap on the hip tiles Kit contents:

- 20 x Large Hip Clips
- 20 x Small Hip Clips

20 % 0.716		BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
ET/HIPCLIP	HIP CLIP PACK (20 LARGE, 20 SMALL)	35	20



# Ridge F Maintenance Pack

Ridge F Maintenance Pack has been designed to replace lost or broken large fixing clips. Kit contents:

• 100 x Stainless Steel Screws

<ul> <li>100 x Large Clips</li> </ul>		BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
*EASYRIDGEFMP	RIDGE F MAINTENANCE PACK (100)	Singles	N/A

<sup>\*</sup>ALSO AVAILABLE IN TERRACOTTA



### Ridge F Union Maintenance Pack

Ridge F Union Maintenance Packs have been designed to replace lost or broken unions and clips. Kit contents:

- 50 x Unions • 100 x Small Clips
- 50 x Large Clips • 50 x Stainless Steel Screws

		BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
*EASYRIDGEFMPU	RIDGE F UNION MAINTENANCE PACK (50)	Singles	N/A
*EASYRIDGE/UNION	RIDGE F UNION PACK (6)	Singles	N/A



# Ridge F Plus

All the benefits of our high quality Ridge F dry fix kits PLUS much more...

The same hydrophobic mesh ventilating ridge roll, film grade polypropylene unions PLUS:

- New flat profile ratchet clips for an improved subtle aesthetic
- An increased number of ratchet teeth for a rapid and accurate
- · Corrosion resistant stainless steel batten straps for improved stability in both hip and ridge applications, and compliant with BS5534 mechanical fix requirements
- Now available in grey, black and terracotta to match most tile colours

# Available in 3m, 6m and 10m kits **Product Colours**









### Kit Contents



### Ridge Roll

- Manufactured from a polypropylene hydrophobic mesh that allows the roof to breathe whilst repelling water
- A central white fabric strip along the centre of the roll enables accurate installation ensuring a neat and aesthetically pleasing ridge line
- · Corrugated aluminium allows a constant 5mm of ventilation
- A pumped butyl self-adhesive strip allows a watertight permanent bond without compromising the integrity of airflow



# Ratchet Clips & Battens

- Flat profile ratchet clips for an improved subtle aesthetic, made from glass filled nylon for superior strength and durability
- An increased number of ratchet teeth for a rapid and accurate installation
- Steel batten straps for improved stability in both hip and ridge applications



### Unions

- Film grade polypropylene material for durability and flexibility - will not weaken when 'flexed'
- Incorporates uniquely designed tracks to divert any penetrating rainfall away from the ridge

BOX

PALLET

# Did you know?

We also sell a Hip Accessory Kit which is to be used in conjunction with Ridge F kits. See page 4 for codes.





		DOX	FALLEI
PRODUCT CODE	DESCRIPTION	QTY	QTY
EASYRIDGEF+3MTR	RIDGE F PLUS 3M GREY DRY FIX RIDGE KIT	Singles	90
EASYRIDGEF+6MTR	RIDGE F PLUS 6M GREY DRY FIX RIDGE KIT	Singles	80
EASYRIDGEF+10MTR	RIDGE F PLUS 10M GREY DRY FIX RIDGE KIT	Singles	60
EASYRIDGEF+3/TE	RIDGE F PLUS 3M TERRACOTTA DRY FIX RIDGE KIT	Singles	90
EASYRIDGEF+6/TE	RIDGE F PLUS 6M TERRACOTTA DRY FIX RIDGE KIT	Singles	80
EASYRIDGEF+10/TE	RIDGE F PLUS 10M TERRACOTTA DRY FIX RIDGE KIT	Singles	60
EASYRIDGEF+3/BL	RIDGE F PLUS 3M BLACK DRY FIX RIDGE KIT	Singles	90
EASYRIDGEF+6/BL	RIDGE F PLUS 6M BLACK DRY FIX RIDGE KIT	Singles	80
EASYRIDGEF+10/BL	RIDGE F PLUS 10M BLACK DRY FIX RIDGE KIT	Singles	60
		-	







# **Hip Accessory Pack**

We also sell a Hip Accessory Kit which is to be used in conjunction with Ridge F kits. Accessory kit contains:

- Short & long leg ratchet clips
- Cut tile fixing clips
- Hip Trays (sufficient to run along a 6m hip)

		BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
EASYRIDGE/HIPKIT	RIDGE F HIP ACCESSORY KIT	Singles	60



Made from PVC, our hip trays are 1.2m in length by 250mm wide. Fitted above the Ridge Roll, they are

designed to provide an even, level run to the hip of a roof.

		DOX	
PRODUCT CODE	DESCRIPTION	QTY	QTY
HIPTRAY/1.2	HIP TRAY 1.2M	Singles	1000



### **Hip Clip Pack**

The hip clip has been designed to secure the cut single lap on the hip tiles Kit contents:

- 20 x Large Hip Clips
- 20 x Small Hip Clips

20 X Ornair Tilp Olips		BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
ET/HIPCLIP	HIP CLIP PACK (20 LARGE, 20 SMALL)	35	20



### Ridge F Plus Maintenance Pack

Ridge F Plus Maintenance Pack has been designed to replace lost or broken large fixing clips. Kit contents:

- 100 x Stainless Steel Screws
- 100 x Large Clips BOX PALLET PRODUCT CODE DESCRIPTION QTY QTY

\*EASYRIDGEFMP RIDGE F MAINTENANCE PACK (100) Singles N/A




### Ridge F Plus Union Maintenance Pack

Ridge F Plus Union Maintenance Packs have been designed to replace lost or broken unions and clips. Kit contents:

- 50 x Unions • 100 x Small Clips
- 50 x Large Clips • 50 x Stainless Steel Screws

		BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
*EASYRIDGE+MPU	EASYRIDGE + UNION MAINT PACK GREY (50)	Singles	N/A
*EASYRIDGE+UP	EASYRIDGE + UNION PACK GREY (6)	Singles	N/A

<sup>\*</sup>ALSO AVAILABLE IN TERRACOTTA AND GREY

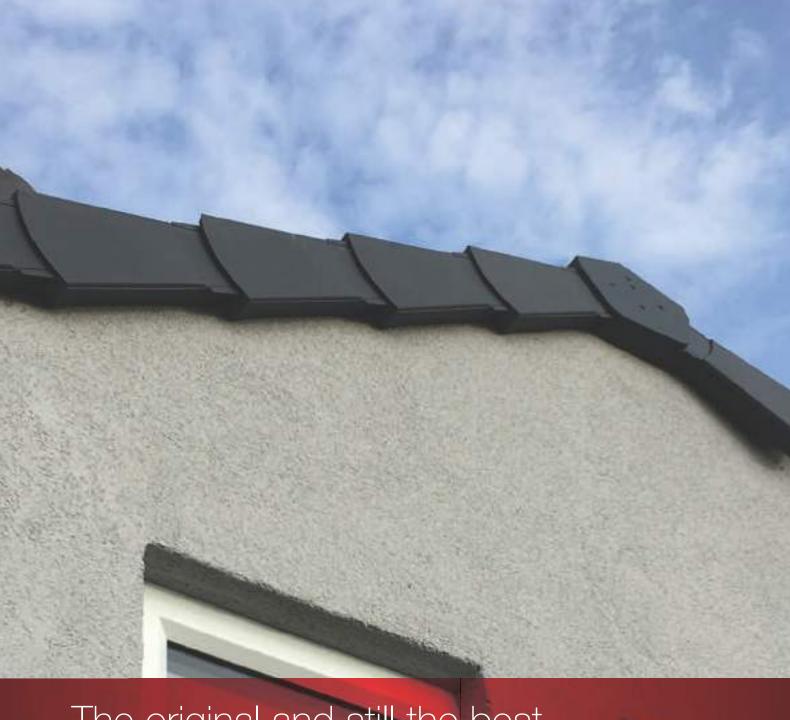

# The original and still the best Universal Dry Verge

- Manufactured from polypropylene for superior flexibility and ease of installation
- Universal handed units; left & right hand pieces no longer required
- Complies with BS5534 mechanical fixing requirements
- Installation suitable in all weather conditions
- Tight secure fit, not vulnerable to wind-dislodgement
- Excellent UV and colour stability, no fading or unsightly staining on soffits
- Available in black, terracotta, grey and brown





# Verge U

Easy-Trim Verge U is truly universal in that the units can be used on the left and right side of the verge, and they are fully compatible with most tile types. The unique design combines fast, simple installation with exceptional holding qualities.

### **Product Colours**







# Did you know?

In conjunction with our Easy-Trim Verge U system, our ridge end caps feature innovative FlapCap Technology. Unique flexible flaps which are designed to contour around the sides of the Verge U piece create a 'sealed' unit, preventing water ingress and infestation whilst also adding to the neatly finished aesthetic.

### Verge Unit



PRODUCT CODE

EASYVERGEU/GREY EASYVERGEU/BROWN EASYVERGEU/TERRA EASYVERGEU/BLK

### DESCRIPTION

VERGE U UNIVERSAL VERGE SYSTEM GREY 50 VERGE U UNIVERSAL VERGE SYSTEM BROWN 50 VERGE U UNIVERSAL VERGE SYSTEM TERRACOTTA 50 VERGE U UNIVERSAL VERGE SYSTEM BLACK 50

# FlapCap 1

BOX PALLET

QTY

800

800

800

800

PALLET

QTY

# Starter & End Cap Blanking Plate Starter

PRODUCT CODE

EASYVERGEU/G/PCK EASYVERGEU/B/PCK EASYVERGEU/T/PCK EASYVERGEU/BL/PCK

### DESCRIPTION

STARTER AND END CAP GREY 2 PACK STARTER AND END CAP BROWN 2 PACK STARTER AND END CAP TERRACOTTA 2 PACK STARTER AND END CAP BLACK 2 PACK

#### BOX PALLET QTY QTY

10 480 480 10 480 10 480 10

BOX

### Ridge Caps



# PRODUCT CODE

EASYVERGEU/HR/G EASYVERGEU/HR/B EASYVERGEU/HR/T EASYVERGEU/HR/BL

EASYVERGEU/A/G EASYVERGEU/A/B EASYVERGEU/A/T EASYVERGEU/A/BL

# DESCRIPTION

QTY QTY HALF ROUND RIDGE CAP GREY 10 800 HALF ROUND RIDGE CAP BROWN 10 800 HALF ROUND RIDGE CAP TERRACOTTA 10 800 HALF ROUND RIDGE CAP BLACK 10 800 ANGLED RIDGE CAP GREY 800 10 ANGLED RIDGE CAP BROWN 10 800 ANGLED RIDGE CAP TERRACOTTA 800 10 ANGLED RIDGE CAP BLACK 10 800

### Batten End Clip




# PRODUCT CODE

EASYVERGEU/CLIP

DESCRI	IOITS	V
BATTEN	END	CLIP

BOX	PALLET
QTY	QTY
NA	NA

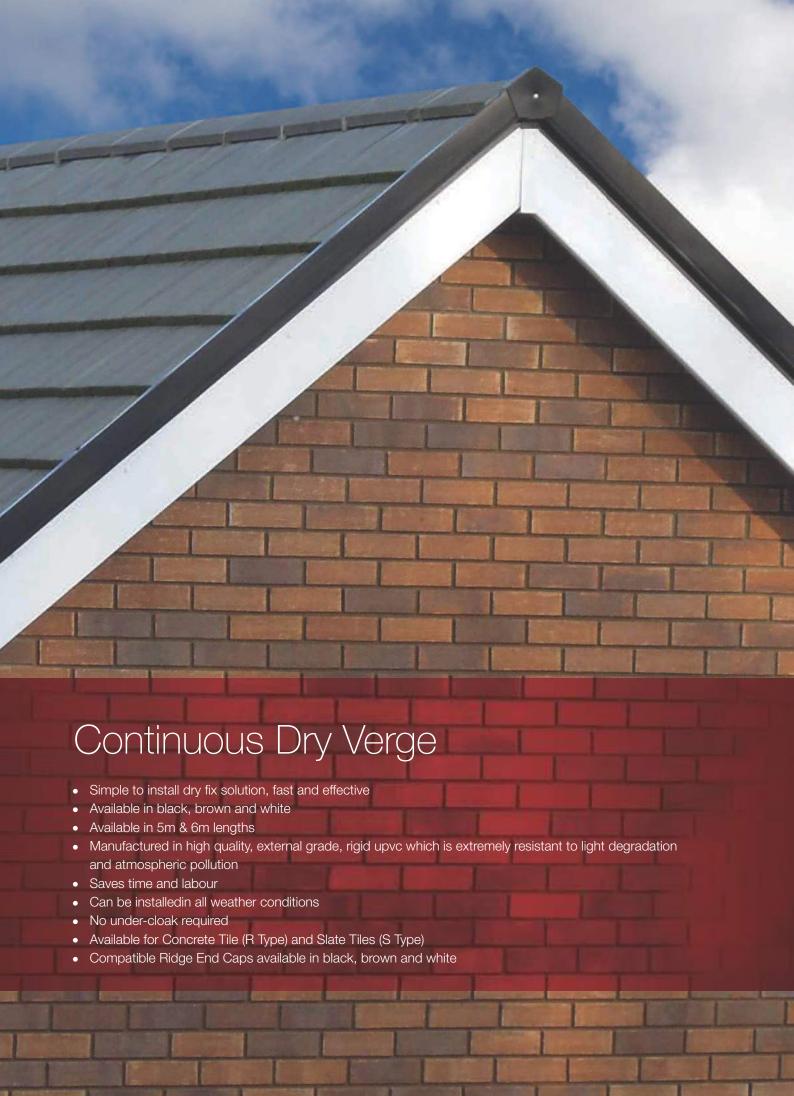



# Verge C

Provides a complete and continuous watertight cover for the joint between roof tiles and brick work or bargeboard, giving greater security to the verge. Continuous dry verge is a fast and effective dry fix solution, without the inconvenience of using mortar and clips, providing a maintenance free, clean and attractive finish to gable ends.




### **Product Colours**















Ridge Caps

# PRODUCT CODE

VERGE/SLATE/BRN5 VERGE/SLATE/BLK5 VERGE/SLATE/WHT5 CDV/SLATE/CONN/BN CDV/SLATE/CONN/B CDV/SLATE/CONN/W

PRODUCT	CODE

CDV/RTYPE/BRN/5M CDV/RTYPE/BLK/5M CDV/RTYPE/WHT/5M CDV/RTYPE/CON/BN CDV/RTYPE/CONN/B CDV/RTYPE/CONN/W

# PRODUCT CODE

CDV/DTYPE/BRN/5M CDV/DTYPE/BLK/5M CDV/DTYPE/W/5M CDV/DTYPE/CON/BR CDV/DTYR/CON/BL CDV/DTYPE/CON/WH

### PRODUCT CODE

CDV/SLATE/END/BN CDV/SLATE/FND/B CDV/SLATE/END/W CDV/RTYPE/END/BN CDV/RTYPE/END/B CDV/RTYPE/END/W CDV/DTYPE/END/BR CDV/DTYPE/END/BL CDV/DTYPE/END/WH

### DESCRIPTION

5M SLATE DRY VERG CONTINUOUS STYPE BROWN 5M SLATE DRY VERG CONTINUOUS STYPE BLACK 5M SLATE DRY VERG CONTINUOUS STYPE WHITE CONT DRY VERGE CONNECTOR SLATE BROWN CONT DRY VERGE CONNECTOR SLATE BLACK CONT DRY VERGE CONNECTOR SLATE WHITE

# DESCRIPTION

5MTR R TYPE CONTINUOUS DRY VERGE BROWN 3 5MTR R TYPE CONTINUOUS DRY VERGE BLACK 3 5MTR R TYPE CONTINUOUS DRY VERGE WHITE 3 CONTINUOUS DRY V VERGE CONNECTOR RTYPE BROWN 1 CONTINUOUS DRY V VERGE CONNECTOR RTYPE BLACK 1 CONTINUOUS DRY V VERGE CONNECTOR RTYPE WHITE

### **DESCRIPTION**

5MTR D TYPE CONTINUOUS DRY VERGE BROWN 3 5MTR D TYPE CONTINUOUS DRY VERGE BLACK 3 5MTR D TYPE CONTINUOUS DRY VERGE WHITE CONTINUOUS DRY V VERGE CONNECTOR RTYPE BROWN 1 CONTINUOUS DRY V VERGE CONNECTOR RTYPE BLACK CONTINUOUS DRY V VERGE CONNECTOR RTYPE WHITE

DESC	CRIP	NOIT

RIDGE CAP FOR S TYPE BROWN
RIDGE CAP FOR S TYPE BLACK
RIDGE CAP FOR S TYPE WHITE
RIDGE CAP FOR R TYPE BROWN
RIDGE CAP FOR R TYPE BLACK
RIDGE CAP FOR R TYPE WHITE
RIDGE CAP FOR D TYPE BROWN
RIDGE CAP FOR D TYPE BLACK
RIDGE CAP FOR D TYPE WHITE

1 1	NA NA
BOX QTY	PALLET QTY

PACK

QTY

3

3

3

**PACK** 

**PACK** 

QTY

QTY

PALLET

QTY

NΑ

NA

NA

NA

NA

NΑ

OTY

NA

NA

NA

NA

NA

NA

PALLET

QTY

NA

NA

NA

NA

PALLET






# Breather Membranes Range

A vapour permeable and airtight breather membrane, designed for use in both fully supported and unsupported installations in tiled or slate pitch roofs and walls.

### Suitable for:

All applications on warm, cold and hybrid roofs, together with installations on Scottish sarking boards, and equally suitable for installations in timber and steel frame constructions.







# Taped Membranes

# Did you know?

In addition to our popular breather range we have introduced our Integrate range of breather membranes. Integrate membranes feature high performance, integrated acrylic tapes allowing rapid installation without the need for battened overlaps. This saves on cost, time and reduces potential health and safety issues. All Integrate membranes are suitable for all 5 National Wind Zones.

- Improved health and Safety
- No tripping hazards and simpler than retrospectively installed taped laps
- No confusion at the counter
- Zone suitability is printed on both the inserts and membrane
- All integrate products are suitable for all 5 National Wind Zones






Summary of test results for wind uplift resistance of Easy-Trim underlays to BS5534 Annex A		
	Geographical Wind Zones	
Underlay Name	345mm Batten Gauge Integrated Tape	
Grafter	Zones 1 - 5	
Master	Zones 1 - 5	
Pro	Zones 1 - 5	
Maxi	Zones 1 - 5	
Fortis	Zones 1 - 5	
Official 'bre' test results.		





# Breather Membrane Range


3 layer thermally bonded construction Grey felt with red printed grid



# **GRAFTER 100GSM**

		PALLET
PRODUCT CODE	DESCRIPTION	QTY
EASYTRIMGRAFT1/20	1.0M X 20M EASY-TRIM GRAFTER 100GSM FELT	60
EASYTRIMGRAFT1	1.0M X 50M EASY-TRIM GRAFTER 100GSM FELT	60
EASYTRIMGRAFT1.5	1.5M X 50M EASY-TRIM GRAFTER 100GSM FELT	42
ET/GRAF/INTE/120	1.0M X 20M EASY-TRIM GRAFTER INTEGRATE 100GSM FELT	60
ET/GRAF/INTE/1	1.0M X 50M EASY-TRIM GRAFTER INTEGRATE 100GSM FELT	60
ET/GRAF/INTE/1.5	1.5M X 50M EASY-TRIM GRAFTER INTEGRATE 100GSM FELT	42


### 3 layer thermally bonded construction Grey felt with blue printed grid



# **MASTER 112GSM**

		FALLET
PRODUCT CODE	DESCRIPTION	QTY
EASYTRIMMASTER1	1M X 50M EASY-TRIM MASTER 112GSM FELT	54
EASYTRIMMASTER15	1.5M X 50M EASY-TRIM MASTER 112GSM FELT	49
ET/MAST/INTE/1	1M X 50M EASY-TRIM MASTER INTEGRATE 112GSM FELT	54
ET/MAST/INTE/1.5	1.5M X 50M EASY-TRIM MASTER INTEGRATE 112GSM FELT	49


### 3 layer thermally bonded construction Grey felt with black printed grid



# **PRO 122GSM**

1 110 12200W		PALLET
PRODUCT CODE	DESCRIPTION	QTY
PROEASYTRIM/1M	1M X 50M EASY-TRIM PRO 122GSM FELT	54
PROEASYTRIM/1.5M	1.5M X 50M EASY-TRIM PRO 122GSM FELT	49
ET/PRO/INTE/1	1M X 50M EASY-TRIM PRO INTEGRATE 122GSM FELT	54
ET/PRO/INTE/1.5	1.5M X 50M EASY-TRIM PRO INTEGRATE 122GSM FELT	49

### 3 layer thermally bonded construction Dark bue felt with white printed grid




# **MAXI 132GSM**

		PALLET
PRODUCT CODE	DESCRIPTION	QTY
EASYTRIMMAXI1	1M X 50M EASY-TRIM MAXI 132GSM FELT	42
EASYTRIMMAXI15	1.5M X 50M EASY-TRIM MAXI 132GSM FELT	36
ET/MAXI/INTE/1	1M X 50M EASY-TRIM MAXI INTEGRATE 132GSM FELT	42
ET/MAXI/INTE/1.5	1.5M X 50M EASY-TRIM MAXI INTEGRATE 132GSM FELT	36






3 layer thermally bonded construction Light blue felt with black printed grid



### **ULTRA 142GSM**

		PALLET
PRODUCT CODE	DESCRIPTION	QTY
EASYTRIMULTRA/1M	1M X 50M EASY-TRIM ULTRA 142GSM FELT	48
EASYTRIMULTRA/15	1.5M X 50M EASY-TRIM ULTRA 142GSM FELT	36


### 3 layer thermally bonded construction Green felt with yellow printed grid



# **VISTA 162GSM**

		PALLET
PRODUCT CODE	DESCRIPTION	QTY
EASYTRIMVISTA1	1M X 50M EASY-TRIM VISTA 162GSM FELT	36
EASYTRIMVISTA15	1.5M X 50M EASY-TRIM VISTA 162GSM FELT	30
ET/VIST/INTE/1	1M X 50M EASY-TRIM VISTA INTEGRATE 162GSM FELT	36


4 layer thermally bonded construction with reinforced high density polyethylene grid Green felt with yellow printed grid



# **FORTIS 160GSM**

		PALLET
PRODUCT CODE	DESCRIPTION	QTY
EASYTRIMFORT1.5	1.5M X 50M EASY-TRIM FORTIS 160GSM REINFORCED FELT	30
ET/FORT/INTE/1.5	1.5M X 50M FORTIS INTEGRATE 160GSM REINFORCED FELT	30

# Moisture Absorbant Membrane Range



# **ULTIMO HS 265GSM**

5 layer thermally bonded construction with 2 layers of reinforced high density polyethylene grids and intelligent fleece.

Grey felt with blue printed grid.



		PALLET
PRODUCT CODE	DESCRIPTION	QTY
ULTIMOHS1MTR	1M X 30M EASY-TRIM ULTIMO HS MOISTURE ABSORBENT	30






# Non-Breathe Membrane

Non-Breathe is a 2 layer, non breathable roof membrane. This lightweight but clean and durable product provides major benefits over traditional 1F bitumen based underlays and plastic under slating membranes. It is completely waterproof and has excellent nail tear resistance.




2 layer thermally bonded construction Black felt with white printed grid



# **NON-BREATHE 120GSM**

PRODUCT CODE DESCRIPTION NONBREATHE 1M X 45M EASY-TRIM NON BREATHE PALLET QTY 48

### Accessories



### **Super Membrane Repair Tape**

The Easy-Trim Super Membrane Repair Tape is a polyacrylate adhesive tape designed for repairs. Available in sizes: 50mm x 25m

		ВОЛ	171221
PRODUCT CODE	DESCRIPTION	QTY	QTY
ET/REPAIR/50X25	SUPER MEMBRANE REPAIR TAPE	24	576



### **Membrane Overlap Tape**

With a strong initial tack, this Membrane Overlap Tape seals overlaps of the Easy-Trim Membrane range. Available in sizes: 38mm x 50m

		DOX	FALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
OVERLAPTAPE	MEMBRANE OVERLAP TAPE	12	384

PALLET

BOY



# Cavity Closer


Easy-Trim Cavity Closer provides a simple and highly effective method for closing cavities around openings in masonry, timber frame and steel frame system wall constructions. Suitable for use in both new build and refurbishment.

# **Product Colours**



### **Features**

- Easy-Trim Cavity Closers are an easy way to achieve building regulations compliance when closing cavities where cavity widths are unknown.
- Available in 2 profiles to fit cavity widths: 50mm - 100mm and 100mm - 150mm
- Innovative multi-width design
- Easy to install with simple cut to size indicators
- Fully ridged pvc cavity closure
- Prevents cold bridging
- Suitable for use in both new build and refurbishment
- Reduces risk of condensation, mould & moisture migration across the cavity
- · Can be used on timber frame constructions
- · Overcomes cavity width variations
- · Complies with relevant building regulations and British Standards





		501/	D411 FT
		BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
ET/MCC/100	GREY PVC CAVITY CLOSER 100MM X 2.4M	10	400
ET/MCC/150	GREY PVC CAVITY CLOSER 150MM X 2.4M	10	300



# Did you know?

Cavity Closer point of sale units available for your branch, speak to your area sales manager for more information

Tel 0845 034 6008






# Over Fascia Vents


Our uniquely designed over fascia vents incorporate Slide Lock Technology to enable rapid installation with secure continual ventilation.

- Each 500mm piece has a male and female end which interlock to create a 1m length
- Robust structure will not crush or warp
- Smooth leading edge for discreet fitting
- 10mm available for cold roof construction
- 25mm for warm roofs, flat roofs and pitches of 15° and below



# **Product Colours**



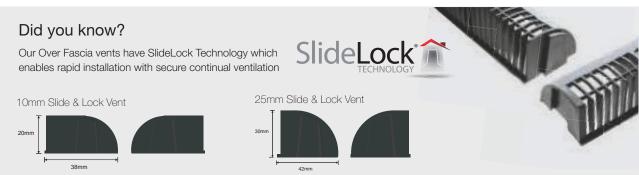




### PRODUCT CODE ETEV/OFV/10 ETEV/OFV/25

DESCRIPTION	
SLIDE & LOCK OVER FASCIA VENT 10MM	/
SLIDE & LOCK OVER FASCIA VENT 25MN	/

BOX	PALLE1
QTY	QTY
60	1440
50	1200







Allows a constant flow of air into the loft space preventing insulation blockage at the eaves and allowing moisture to escape. 6m lengths available in:

- 300mm
- 400mm
- 600mm
- 800mm

		BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
RAFT300	CONTINUOUS RAFTER TRAY 6M X 300MM	10	360
RAFT400	CONTINUOUS RAFTER TRAY 6M X 400MM	10	300
RAFT600	CONTINUOUS RAFTER TRAY 6M X 600MM	10	180
RAFT800	CONTINUOUS RAFTER TRAY 6M X 800MM	10	140



# Eaves Support Trays

A high quality recycled PVC support tray that ensures any roof underlay does not drape into the gutter, preventing water ponding behind fascias and rotting of roof underlay, thus reducing maintenance levels.

		DOX	1/1
PRODUCT CODE	DESCRIPTION	QTY	QTY
ETEV/FST	1.5M FELT SUPPORT TRAY	NA	1000
EASYTRAY1.5	1.5M PREMIUM FELT SUPPORT TRAY	NA	1000



# 2-in-1 Felt Support Trays

A high quality support tray that ensures any roof underlay does not drape into the gutter, preventing water ponding behind fascias and rotting of roof underlay, thus reducing maintenance levels. Our 2-in-1 tray has an PALLET inbuilt over fascia vent to promote air circulation.

PRODUCT CODE DESCRIPTION QTY 2IN1FST 2-IN-1 VENTED FELT SUPPORT TRAY & OVER FASCIA VENT 40 480



# 3-in-1 Felt Support Trays

A high quality support tray that ensures any roof underlay does not drape into the gutter, preventing water ponding behind fascias and rotting of roof underlay, thus reducing maintenance levels. Our 3-in-1 tray incorporates an over fascia vent and the further addition of a bird comb strip to combat bird and insect infestation.

		BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
3IN1FST	3-IN-1 VENTED FELT SUPPORT TRAY,	20	240
	OVED EXCOLA VENT & RIDD COMP STDID		



# **Eaves Comb**

A physical barrier that prevents birds, bats and insects entering the roof void between felt and tiles, causing nesting and infestation problems.

		DOX	
PRODUCT CODE	DESCRIPTION	QTY	QTY
COMBFILLER	COMB FILLER 1000MM	300	6000



# Circular Soffit Vents

To be fitted before or after the installation of soffit boards. Ventilates and protects against insects.

- Easy to install with a simple push-fit into fixing holes
- Suitable for use in both new or existing soffits
- Slot spacing designed to prevent ingress of large insects
- Complies with relevant building regulations and British Standards
- Supplied in an Easy-Trim branded box with a perforated section ideal for Point of Sale displays

### **Product Colours**

Black	Brown	Grey	Tan	White	вох
PRODUCT CO	DDE D	ESCRIPTION			QTY
ETEV/CSV/BL	ACK B	LACK CIRCULA	R SOFFIT VEN	ITS	50
ETEV/CSV/BROWN		BROWN CIRCULAR SOFFIT VENTS			50
ETEV/CSV/GF	REY G	REY CIRCULAR	SOFFIT VENT	S	50
ETEV/CSV/TA	.N TA	AN CIRCULAR S	OFFIT VENTS		50
ETEV/CSV/WI	HITE W	HITE CIRCULAI	R SOFFIT VEN	TS	50



# Weep & Peep Vents

The Weep vents have an integral grill design to prevent rain ingress during high winds and a lip to ease positioning during use. It is wide enough not to become blocked by day to day debris yet small enough to prevent access by large insects.

The Peep vents provide cavity wall drainage solutions, allowing rain water to easily escape the cavity wall via a discreet aperture in the vent.

# **Product Colours**

Black	Terracotta	Grey	Brown	Clear	Buff	White
						BOX
PRODUCT C	CODE	DESCRIPTION				QTY
ETEV/WEEP	/TERRA	WEEP VENT TER	RRACOTTA			50
ETEV/WEEP	/BUFF	WEEP VENT BUI	=F			50
ETEV/WEEP	/WHITE	WEEP VENT WH	ITE			50
ETEV/WEEP	/CLEAR	WEEP VENT CLE	EAR			50
ETEV/WEEP	/BROWN	WEEP VENT BRO	NWC			50
ETEV/WEEP	/GREY	WEEP VENT GRI	EY			50
ETEV/WEEP	/BLACK	WEEPVENT BLA	CK			50
ETEV/PEEP/	BLACK	PEEP WEEP BLA	ACK			100
ETEV/PEEP/	CLEAR	PEEP WEEP CLE	EAR			100
ETEV/PEEP/	TERRA	PEEP WEEP TEF	RRACOTTA			100
ETEV/PEEP/	BUFF	PEEP WEEP BUI	FF			100



# **Eaves Protection Strip**

An alternative to our recycled PVC rigid eaves protection, Easy-Trim Protect is a high quality bitumen based eaves support strip that prevents roof underlay drape into the gutter. Available in:

• 330mm x 16m	• 500mm x 16m	вох
PRODUCT CODE	DESCRIPTION	QTY
ETEP/5U/330	EAVES PROTECTION STRIP 330MM X 16M 5U FELT	90
ETEP/5U/500	EAVES PROTECTION STRIP 500MM X 16M 5U FELT	60

Can be ordered in multiples of 30 only



# Tile Vents

- A simple solution to alleviate the accumulation of condensation in the loft space. All designs in our range are practical and unobtrusive with clean aesthetics.
- Suitable for high and low ventilation and also as an outlet terminal for extraction fans and soil pipe ventilation. Available in a wide range of standard colours with colour matching service also available.
- Our range of profiles are compatible with tile ranges from most UK tile manufacturers.





# Lowline Slate Vents

Available in Pinseal (smooth) or Riven (texture slate like appearance) finish with a virtually flat 10k ventilation area to significantly reduce the risk of ventilation blockage. Suitable for pitches of 22.5° and above.

- Recommended 4mm flyscreen protection
- Fully compliant with NHBC, BS 5250:2002 and BR document requirements.

PRODUCT CODE DESCRIPTION

ETEV/SVP/600300 LOWLINE SLATE VENT (600 X 300MM) PIN SEAL ETEV/SVR/600300 LOWLINE SLATE VENT (600 X 300MM) RIVEN

All our tile vents are produced to order and are therefore subject to a lead time, available on request.





# Plain Tile Vents

An injection moulded ventilator which offers precision and strength. Suitable for all plain clay tiles to BS402 part 1 and roof pitches of 30° and above.

- UV acrylic paint finish to suit most colours
- 7.5kmm<sup>2</sup> ventilation area
- Moulded in 'High Impact Polystyrene'

PRODUCT CODE DESCRIPTION

PTV/RED INLINE PLAIN TILE VENT RED



# Universal Cowl Tile Vents

Moulded High Impact Polystyrene with UV stable paint to suit most colours. An unobtrusive design suitable for use with most manufacturers profiles, and has a patented 'anti-splash' sleeve device incorporating a 4mm fly-screen protection.

- Suitable for roof pitches of 15° and above
- Allows air to enter the roof space for cross flow ventilation
- Available as 10k or 20k cowl and new solar tiles

PRODUCT CODE DESCRIPTION

ETEV/U/GRY UNIVERSAL COWL TILE VENT 10K DARK GREY

# Interlocking Tile Lowline Vents

PRODUCT CODE

DESCRIPTION ETEV/G/G LOWLINE GEMINI TILE VENT DARK GREY

### Accessories



Moulded Flexipipe



Flexitube with clips




Square to round pipe adapters



Rectangle to round pipe adapters

		PACK	BOX
PRODUCT CODE	DESCRIPTION	QTY	QTY
ETEV/FH/112	FLEXIHOSE AND CLIPS 112MM	Singles	50
ETEV/FP/110	EASY TRIM MOULDED FLEXIPIPE 110/110	Singles	25
ETEV/FP/75	EASY TRIM MOULDED FLEXIPIPE 110/75	Singles	25
ETEV/STR/110	SQUARE TO ROUND 110MM	Singles	NA
ETEV/RTR/110	RECTANGLE TO ROUND 110MM	Singles	NA

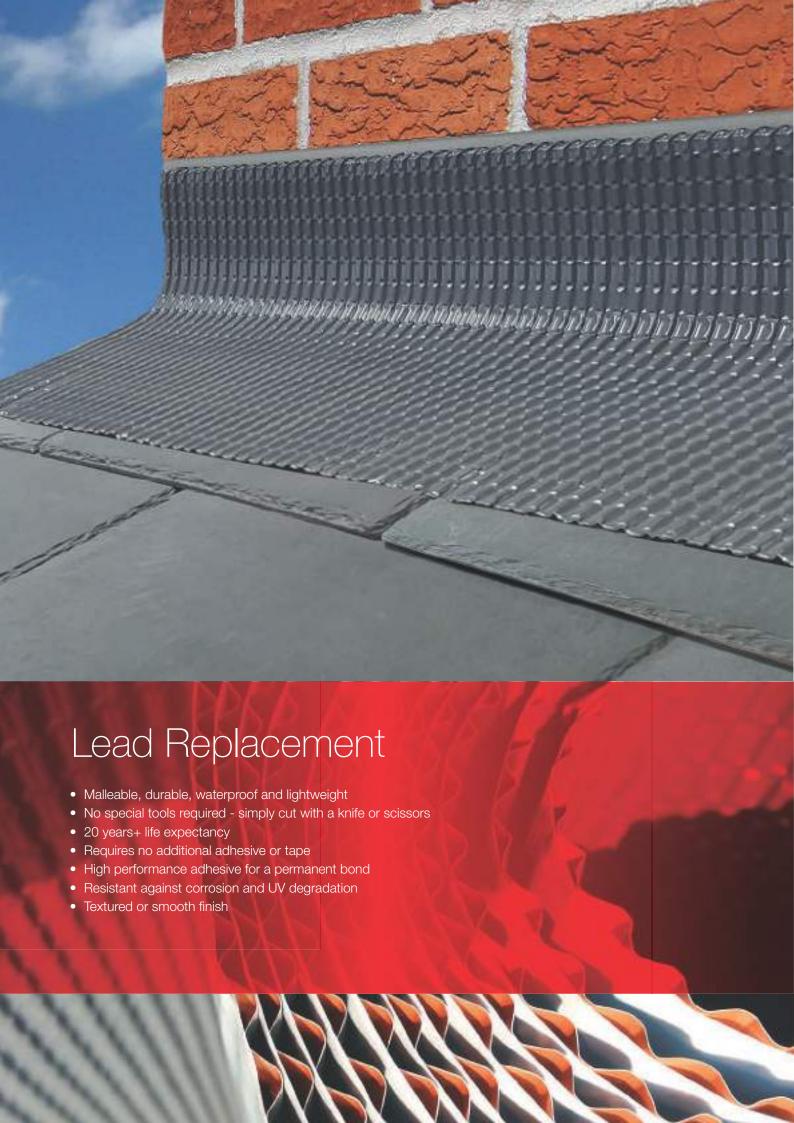





# 20 Year Life Expectancy!

### Lead R

A sheet aluminium alternative to traditional lead with a protective anti-corrosion coating and a high performance butyl adhesive underside. Zero resale value, eliminating theft and vandalism - a common issue with traditional lead roofing products.

# Did you know?

Lead point of sale units are available for your branch, speak to your area sales manager for more information or contact us

Tel 0845 034 6008



### **Typical Applications:**

- Abutments
- Chimneys
- Dormers
- Saddles
- Windows and rooflights
- Valley and gutters

### **Technical Data**

- Surface finish: Corrugated or smooth
- Temperature resistance: -40°c / +90°c
- Minimum working temp: +5°C
- Life expectancy: Minimum 20 yrs
- Resistant against corrosion & UV degradation

# Textured Lead Replacement



### **Lead R Textured**

Our textured pattern provides excellent malleability and formability whilst maintaining long term durablilty and perfomance. 5m rolls available in widths: 150mm, 300mm, 450mm & 600mm

### **Product Colour**



		BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
EASYLEADR1505	EASY LEAD R TEXTURED 150MM X 5M ROLL	Singles	192
EASYLEADR3005	EASY LEAD R TEXTURED 300MM X 5M ROLL	Singles	96
EASYLEAD4505	EASY LEAD R TEXTURED 450MM X 5M ROLL	Singles	72
EASYLEADR6005	EASY LEAD R TEXTURED 600MM X 5M ROLL	Singles	48

# Smooth Lead Replacement




Our high performance, smooth lead replacement. A high quality self adhesive alternative to traditional lead that can be used in both flat and pitched roof applications. 5m rolls available in widths: 150mm, 300mm, 450mm & 600mm



PRODUCT CODE EASYLEADR1505SMT EASYLEADR3005SMT EASYLEADR4505SMT EASYLEADR6005SMT





	BOX	PALLET
DESCRIPTION	QTY	QTY
EASY LEAD R SMOOTH 150MM X 5M ROLL	Singles	192
EASY LEAD R SMOOTH 300MM X 5M ROLL	Singles	96
EASY LEAD R SMOOTH 450MM X 5M ROLL	Singles	72
EASY LEAD R SMOOTH 600MM X 5M ROLL	Singles	48



### Lead Accessories



### **Lead Flashing Fixing Clips**

The Easy-Trim Fixing Clip grips lead firmly in place in seconds so it can be dressed more easily before being pointed in.

- Suitable for joints of 6mm 18mm
- 50 clips per pack

PRODUCT CODE **DESCRIPTION** BOX QTY PALLET QTY HALLCLIP LEAD FLASHING HALL CLIP (50) NA



### **Lead Sealant**

A high quality roofing and flashing sealant that prevents weather ingression, tile lift and noise. This fast skinning sealant is suitable for use with conservatories, industrial and domestic systems, air conditioning units and ducting. It is the only approved sealant for our Lead R system.

PRODUCT CODE DESCRIPTION PALLET QTY **BOX QTY** ULTIMATE LEAD SEALANT GREY 310ml EASYLEADS 25 NA



### **Patination Oil**

A protective coating for new lead which imparts an evenness of colour while its normal patina is being formed. To be applied on day of lead installation.

PRODUCT CODE DESCRIPTION **BOX QTY** PALLET QTY ETES/PATOIL/1LTR PATINATION OIL 1LTR



### **Grab Plus**

Grab Plus is the ultimate strength adhesive and sealant suitable for use indoor and out, in all weather conditions. Superior bonding power even on wet surfaces. Rapid curing, fully elastic and can be painted over once dry. Colours available: White & Black.

PRODUCT CODE	DESCRIPTION	BOX QTY	PALLET QTY
ETES/EASYGRAB+/B	EASY-GRAB PLUS BLACK 310ml	12	NA
ETES/EASYGRAB+/W	EASY-GRAB PLUS WHITE 310ml	12	NA



### Slate Repair Hooks

A permanent but hidden, slate fixing and revolutionary roof slate repair tool.

PRODUCT CODE	DESCRIPTION	BOX QTY	PALLET QTY
HALLHOOK	SLATE REPAIR HOOK (10)	50	NA



# PolyureCoat

PolyureCoat is a liquid waterproofing membrane, formulated from a unique blend of moisture triggered polyurethane resin to produce a fast curing, seamless, tough and elastic waterproofing system. Highly durable and puncture resistant. Ideal for both new construction and refurbishment projects.

- Low odour system
- Suitable for applications on new, refurbishment projects and commercial roofs
- Seamless waterproofing system
- Applicable on existing bitumen felt, existing asphalt, concrete, GRP, Single ply (PVC) membranes and metal surfaces
- 10 Year Guarantee upto 20 Year Guarantee (with the Approved Contractor Scheme) - see page 8 for details





Quick Cure water resistant in 60 minutes\*



Protection against rust, wear and corrosion



Suitable for use on balconies and walkways



Bonds & adheres to all types of substrates



Quick & easy to apply



Suitable for flat roofs



Resistance to abrasion & high elasticity

### Accessories

• Trims & Lengths


Easy-Trim's wide range of flat roof trims, to be used alongside the PolyureCoat liquid waterproofing system. The range of trims complete the flat roof, giving a decorative edge and also ensuring the whole system is completely waterproof and durable.

- Reactivator
- Reinforcing Fleece
- Accelerator
- PolyureSeal

### Did you know?

Our comprehensive PolyureCoat Brochure is now available. Full product codes, applications, technical specification, plus much more... Contact us to request your copy.





# PolyureCoat APPROVED CONTRACTOR SCHEME

What is the PolyureCoat Approved Contractor Scheme? A one day practical and written assessment with interactive roof models. Trainees will be assessed and are required to pass a final exam.

How much does it cost to join the Scheme? £150 per person. This will be refunded via product vouchers after 3 successful inspected installations. Classes are restricted to 8 participants.

What are the benefits of the PolyureCoat Approved Contractor Scheme? Easy-Trim will refer potential contracts for PolyureCoat applications. In addition to this, approved contractors will be listed on our national database and will receive a unique Approved Contractor Card plus a PolyureCoat Welcome Pack, access to excellent offers, quarterly newsletters and instant access to the Easy-Trim App.






### Trims

Our wide range of flat roof trims, to be used alongside the PolyureCoat liquid waterproofing system. The range of trims complete the flat roof, colour matched to Polyurecoat giving a decorative edge and also ensuring the whole system is completely waterproof and durable. Trims can be used in conjunction with

other products including GRP resin systems.







### **Gutter Drip External Corner**

Gutter Drip External Corners are pre-formed corners that work in conjunction with Gutter Drip Trims. They are designed to allow rainwater to run off the roof into the gutter, also providing a neat and aesthetically pleasing finish to the perimeter of the roof. They are also available in a 2.5m length to edge the whole roof

PRODUCT CODE DESCRIPTION

ET/POLYU/GD/E **GUTTER DRIP EXTERNAL CORNER** FT/POLYU/GD/2.5 GUTTER DRIP 2.5M LENGTH





### Water Stop Internal/External Corner

A pre-formed internal/external corner with its own water stop kerb to be used to direct water towards the gutter edge without need for mitring on site. Water Stop Trims are also available in a 2.5m length to edge the whole roof

PRODUCT CODE DESCRIPTION

WATER STOP INTERNAL CORNER FT/POLYU/WS/L ET/POLYU/WS/E WATER STOP EXTERNAL CORNER ET/POLYU/WS/2.5 WATER STOP 2.5M LENGTH



PRODUCT CODE DESCRIPTION

ET/POLYU/WS-GD 1 x RIGHT COMBI CORNER AND 1 x LEFT COMBI CORNER



### **Wall Termination Trim**

Designed to fit into a chase in the brickwork and prevent water ingress.

Length: 2.5m

PRODUCT CODE DESCRIPTION

WALL TERMINATION TRIM 2.5M ET/POLYU/WTT/2.5





# Fibapol

Fiba-Pol is a liquid roof repair coating that is moisture tolerant, cold applied, and reinforced with glass fibres. An effective and economical repair and waterproofing solution for damaged or leaking roofs and gutters.

Fiba-Pol provides instant repairs and waterproofing for a wide range of applications in exposed conditions. The product is impervious to water and will provide an effective barrier to the transmission of liquid water and water vapour, until such time full systems or longer term solutions can be implemented.

# Available in 5kg and 20kg tin sizes.



### **Applications**

- Felt, Mastic Asphalt & Mineral Finished Roofs
- Gutters, Lead Work & Flashing
- Pipe work and Drains
- Slates
- Metal
- Roof lights

### **Benefits**

- Cost effective
- Can be applied in any weather conditions
- Can be applied at low temperatures
- Instantly seals a roof in one coat
- Can be applied in the damp
- Dries completely to allow light foot traffic (for cleaning windows etc)
- Made from elastomeric polymers that move with your building
- Dries in 2-4 hours
- Bonds to bitumen surfaces 5 x better than other similar products (due to Nano technology)
- Heat free and seamless application

### Typical Physical & Performance Data

Fibrous Liquid Dark Grey/White/Black Colour **Application Temperature** Limits to 40°c Shelf Life 12 Months Pack Sizes 5kg & 20kg



		BOX	PALLET
PRODUCT CODE	DESCRIPTION	QTY	QTY
ETEP/FIBA/5KG/G	EASY TRIM FIBA POL 5KG GREY	4	144
ETEP/FIBA/5KG/B	EASY TRIM FIBA POL 5KG BLACK	4	144
ETEP/FIBA/5KG/W	EASY TRIM FIBA POL 5KG WHITE	4	144
ETEP/FIBA/20KG/G	EASY TRIM FIBA POL 20KG GREY	N/A	24
ETEP/FIBA/20KG/B	EASY TRIM FIBA POL 20KG BLACK	N/A	24
ETEP/FIBA/20KG/W	EASY TRIM FIBA POL 20KG WHITE	N/A	24



### Bitumen Trowel



A compound of bitumen, solvents, mineral fibres and non-drying oils. Easy-Trim Bitumen Trowel Mastic is a plastic, non-slumping compound which provides an effective seal between most roofing materials. It is used for general waterproofing and sealing repairs; sealing cracks, holes and joints either as a finish or before the application of other materials and for remedial work before the application of Flashband.

# Types of Application

- Filling cracks and fissures in concrete, roofing felt, asphalt, lead, zinc, corrugated asbestos-cement, steel, masonry and renderings
- Joint-sealing in gutters, spouts, down-pipes, between corrugated asbestos-cement and iron sheetings, around skylights and pre-cast concrete units
- · Bedding tiles, slates and flashings in position

Colour Black

1kg will occupy approximately 660 cubic centimetres (1lb per 18.3 cubic inches) Coverage

### Available in 5 Litre and 25 Litre tin sizes.

PRODUCT CODE	DESCRIPTION	BOX QTY	PALLET QTY
ETEP/TM/5	5LTR BITUMEN TROWEL MASTIC	4	144
ETEP/TM/25	25LTR BITUMEN TROWEL MASTIC	N/A	24

# **Cold Gritting Solution**



Easy-Trim Cold Gritting Solution is a cold applied, ready to use and solvent based, bituminous adhesive. It conforms to the requirements of BS Code of Practice 144: Part 3. It is designed to bond a wide variety of aggregates to built-up felt and mastic asphalt roof surfaces, providing a final solar reflective, weatherproof and damage resistant surface. The product is suitable for roofs with up to a 10° slope. Chippings compatible with Easy-Trim Cold Gritting Solution include:

- Limestone
- · White Calcined Spar
- Gravel
- Granite
- Flint

Colour

Coverage Dependant on the size of chippings to be bonded:

> **3 - 9 mm** (1.8m<sup>2</sup> per litre) 12mm (1.3m<sup>2</sup> per litre)

Available in 25 Litre tin sizes.

PRODUCT CODE DESCRIPTION BOX QTY PALLET QTY

ETEP/CS/25 25LTR COLD GRITTING SOLUTION N/A 24

# Weather Proofing

### Bitumen Paint



Easy-Trim Bitumen Paint is a fast drying, solvent based, full bodied bituminous paint to comply with British Standard 3416: Type I and Type II. It provides an effective waterproof, weatherproof, corrosion resistant protective coating. It is resistant to low concentrations of alkalis and acids and can withstand prolonged oxidation. It is suitable for application to a wide variety of materials including iron and steel, lead, zinc, aluminium, asbestos-cement, concrete, stone and brick.

- Metal production corrugated iron sheds, fire escapes, stairways, ladders, storage tanks, gutters, down-pipes, fences, railings, gates etc
- Protecting drinking water tanks
- A protective coating for concrete structures, stone, brick, concrete screeds and sand / cement surfaces

**Colour** Black, shiny coating when dry

**Coverage** Onto metal and smooth surfaces 10m<sup>2</sup>/litre (approx 490 sq.ft per imp.gallon)

# Available in 5 Litre and 25 Litre tin sizes.

PRODUCT CODE	DESCRIPTION	BOX QTY	PALLET QTY
ETEP/BP/5	5LTR BITUMEN PAINT	4	144
ETEP/BP/25	25LTR BITUMEN PAINT	N/A	24

# Bitumen Primer



A cold applied solvent based bituminous solution designed to penetrate and seal porous surfaces prior to the application of covering materials. Conforms to BS Code of Practice 144, Part 3.

### Uses

Bitumen Primer seals porous substrates and encourages the adhesion of bituminous waterproofing systems and sheet coverings. It may be applied successfully to a wide range of surfaces:

- Concrete
- Asbestos cement
- Slate
- Metals mild steel, zinc, lead
- Lightweight concrete screeds.


**Colour** Silver coating when dry

Coverage The application of BITUMEN PRIMER varies according to the

porosity of the surface

### Available in 5 Litre and 25 Litre tin sizes.

PRODUCT CODE	DESCRIPTION	BOX QTY	PALLET QTY
ETEP/BPR/5	5LTR BITUMEN PRIMER	4	144
ETEP/BPR/25	25LTR BITUMEN PRIMER	N/A	24

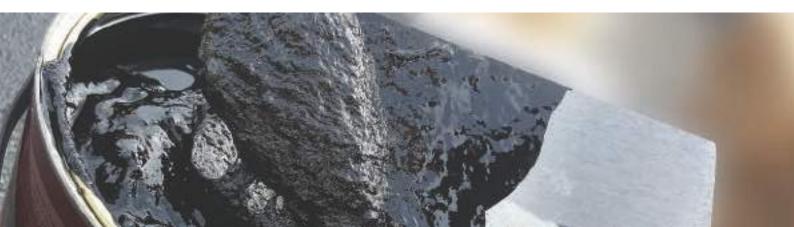



# Felt Adhesive



Easy-Trim Felt Adhesive is a solvent based, high viscosity, bituminous adhesive with strong initial "grab" properties. It is a cold applied roofing adhesive formulated for convenience and safety, ensuring affinity and a strong, final bond to roofing felts. It is used for:

- · Bonding all types of roofing felts to metal, timber and concrete
- · Sealing roofing felt laps
- Bonding chippings to flat roofs

Colour Black

2 sq.metres per litre (approx. 100 sq.ft. per imperial gallon

### Available in 5 Litre and 25 Litre tin sizes.

PRODUCT CODE	DESCRIPTION	BOX QTY	PALLET QTY
ETEP/FA/5	5LTR FELT ADHESIVE	4	144
ETEP/FA/25	25LTR FELT ADHESIVE	N/A	24

# Solar Reflective Paint



Easy-Trim Solar Reflective Paint is a solvent based bituminous coating, containing high quality leafing grade aluminium flake. It provides an excellent highly reflective bright silver coloured finish when dry, providing an effective waterproof and weatherproof protective coating, particularly where exposed bituminous, steel and corrugated iron surfaces are encountered.

Colour Silver coating when dry

Coverage 4-6m<sup>2</sup> / litre per coat depending on porosity of substrate

10m<sup>2</sup> / litre on non-porous surfaces

### Available in 5 Litre and 25 Litre tin sizes.

PRODUCT CODE	DESCRIPTION	BOX QTY	PALLET QTY
ETEP/SR/5	5LTR SOLAR REFLECTIVE PAINT	4	144
ETEP/SR/25	25LTR SOLAR REFLECTIVE PAINT	N/A	24

# All Weather Compound



Easy-Trim All Weather Compound is a heavy duty, solvent based bituminous roof coating, compounded with fillers and fibres. It is of a brushable consistency. It is an effective, general purpose roof coating. It is almost instantly rain resistant after application and is therefore particularly suited to winter use. Applied by brush or spray to waterproof and reseal many different types of roof covering, including:

- Asphalt roofs
- Concrete roof decks
- Slates & tiles
- Built-up felt roofs
- Asbestos cement sheeting
- Metal sheeting, including iron, steel, zinc & lead

Colour

1.0 - 1.5 m<sup>2</sup> per litre per coat. Recommended two coat application.

### Available in 5 Litre and 25 Litre tin sizes.

PRODUCT CODE	DESCRIPTION	BOX QTY	PALLET QTY
ETEP/AW/5	5LTR ALL WEATHER COMPOUND	4	144
ETEP/AW/25	25LTR ALL WEATHER COMPOUND	N/A	24



# APP Torch-On Membranes

Maxi Torch APP Cap Sheets encompass the standard range having a glass fibre carrier and the APP Premium range having a high quality polyester carrier. APP Cap Sheets are more forgiving under foot.

# Maxi-Torch APP Premium Mineral

# **Product Finishes**



Black Finish



Green Finish

Material Upper Finish Mineral Granules Underside Finish PE Film Carrier Polyester Black and Green Colour **Dimensions** 1m x 8m

### **Applications**

Can be applied as upper layer in multi-ply systems. Single-ply application not recommended. Self-protected membrane. Heavy topping not required. Application using torch-on.

### **Technical Data**

Watertightness EN 1928:2000(B) Pass (60 kPa) Maximum tensile strength Longitude/Transverse EN 12311-1 350/250 N/50mm  $\leq$  -5°C Flexibility at low temperature EN 1109

PRODUCT CODE DESCRIPTION PALLET QTY MAXI/APP/BLK/PRE MAXI TORCH APP BLACK PREMIUM 1mtr x 8m 4kg 25 MAXI/APP/GRN/PRE MAXI TORCH APP GREEN PREMIUM 1mtr x 8m 4kg 25



PALLET QTY

# Maxi-Torch APP Mineral

### **Product Finishes**



Green Finish

Material Upper FinishMineral GranulesUnderside FinishPE FilmCarrierGlass

ColourGreen and BlackDimensions1m x 8m

### **Applications**

Can be applied as upper layer in multi-ply systems. Single-ply application not recommended. Self-protected membrane. Heavy topping not required. Application using torch-on.

#### **Technical Data**

PRODUCT CODE

Watertightness EN 1928:2000(B)

Maximum tensile strength Longitude/Transverse EN 12311-1

Flexibility at low temperature EN 1109

Pass (60 kPa)

350/250 N/50mm

≤ -5°C

DESCRIPTION

MAXI/APP/GRN MAXI TORCH APP GREEN 1m x 8m 4kg 2

# Maxi-Torch APP 4kg Universal Sanded Underlay/Capsheet

### **Product Finishes**



Sand Finish

Material Upper FinishSandUnderside FinishPE FilmCarrierPolyesterColourSandDimensions1 m x 8m

### **Applications**

Can be applied as upper layer in multi-ply systems. Can be applied single-ply in certain systems. To be applied under heavy protection. Application using hot pour oxidate asphalt bonding and/or torch-on.

### **Technical Data**

Watertightness EN 1928:2000(B) Pass (60 kPa) Maximum tensile strength Longitude/Transverse EN 12311-1 700/500 N/50mm Flexibility at low temperature EN 1109  $\leq$  -5°C

PRODUCT CODE DESCRIPTION PALLET QTY

MAXI/APP/SANDED MAXI TORCH APP SANDED 4kg UNIVERSAL 8m 30

# Maxi-Torch Unilay Sanded Underlay

### **Product Finishes**



Sand Finish

Material Upper FinishSandUnderside FinishPE FilmCarrierPolyesterColourSand

**Dimensions** 1m x 16m 2mm thick

### **Applications**

Can be applied as upper layer in multi-ply system. Single ply application not recommended. To be applied under heavy protection. Application using torch-on.

### **Technical Data**

Watertightness EN 1928:2000(B) Pass (60 kPa) Maximum tensile strength Longitude/Transverse EN 12311-1 350/250 N/50mm Flexibility at low temperature EN 1109  $\leq$  -5°C

PRODUCT CODEDESCRIPTIONPALLET QTYMAXI/APP/UNILAYMAXI TORCH APP UNILAY 1m x 16m 4kg25



# SBS Torch-On Membranes

Manufactured from polymer bitumen modified with SBS polymers. Making SBS a more malleable layer prefered by professional roofers.



# Maxi-Torch SBS Premium Mineral

### **Product Finishes**



Black Finish



Green Finish

Material Upper FinishMineral GranulesUnderside FinishPE FilmCarrierPolyesterColourBlack and GreenDimensions1m x 8m

### **Applications**

Can be applied as upper layer in multi-ply systems. Single-ply application not recommended. Self-protected membrane. Heavy topping not required. Application using torch-on.

### **Technical Data**

Watertightness EN 1928:2000(B)

Maximum tensile strength Longitude/Transverse EN 12311-1

Flexibility at low temperature EN 1109

Pass (60 kPa)

700/500 N/50mm

≤ -15°C

PRODUCT CODE DESCRIPTION PALLET QTY

MAXI/SBS/BLK/PRE MAXI TORCH SBS BLACK PREMIUM 1m x 8m 5kg 25 MAXI/SBS/GRN/PRE MAXI TORCH SBS GREEN PREMIUM 1m x 8m 5kg 25

### Maxi-Torch SBS Mineral

### **Product Finishes**



Black Finish



Green Finish

Material Upper FinishMineral GranulesUnderside FinishPE FilmCarrierPolyesterColourBlack and GreenDimensions1m x 8m

### **Applications**

Can be applied as upper layer in multi-ply systems. Single-ply application not recommended. Self-protected membrane. Heavy topping not required. Application using torch-on.

### **Technical Data**

Watertightness EN 1928:2000(B)

Maximum tensile strength Longitude/Transverse EN 12311-1

Flexibility at low temperature EN 1109

Pass (60 kPa) 700/500 N/50mm ≤ -15°C

ility at low temperature EN 1109 ≤ -15

PRODUCT CODEDESCRIPTIONPALLET QTYMAXI/SBS/BLKMAXI TORCH SBS BLACK 1m x 8m 5kg28MAXI/SBS/GRNMAXI TORCH SBS GREEN 1m x 8m 5kg28



## Maxi-Torch SBS Premilay Sanded Underlay

#### **Product Finishes**



Sand Finish

Material Upper Finish
Underside Finish
Carrier
Sand
PE Film
Polyester
Colour
Sand

**Dimensions** 1m x 16m 2mm thick

#### **Applications**

Can be applied as upper layer in multi-ply system. Single ply application not recommended. To be applied under heavy protection. Application using torch-on.

#### **Technical Data**

PRODUCT CODE DESCRIPTION PALLET QTY

MAXI/SBS/PREMILY MAXI TORCH SBS PREMILAY 1m x 16m 25

## Maxi-Torch SBS 4.8kg Universal Sanded Underlay/Capsheet

#### **Product Finishes**



Sand Finish

Material Upper Finish<br/>Underside FinishSand<br/>PE FilmCarrierPolyesterColourSandDimensions1m x 8m

#### **Applications**

Can be applied as upper layer in multi-ply system. Can be applied single-ply in certain systems. To be applied under heavy protection. Application using hot pour oxidate asphalt bonding and/or torch-on.

#### **Technical Data**

Watertightness EN 1928:2000(B) Pass (10 kPa) Maximum tensile strength Longitude/Transverse EN 12311-1 700/450 N/50mm Flexibility at low temperature EN 1109  $\leq$  -15°C

PRODUCT CODE DESCRIPTION PALLET QTY

MAXI/SBS/SANDED MAXI TORCH SBS SANDED 4.8kg UNIVERSAL 8m 25

## Maxi-Torch SBS Film/Film Underlay

#### **Product Finishes**



PE Film

 Material Upper Finish
 PE Film

 Underside Finish
 PE Film

 Carrier
 Polyester

 Colour
 Black

 Dimensions
 1m x 13m

#### **Applications**

Should be applied as intermediate or underlayer in multi-ply systems. Single ply application not recommended. To be applied under heavy protection. Application using torch-on.

#### **Technical Data**

Watertightness EN 1928:2000(B) Pass (60 kPa)

Maximum tensile strength Longitude/Transverse EN 12311-1 350/250 N/50mm

Flexibility at low temperature EN 1109 ≤  $-15^{\circ}$ C

PRODUCT CODE DESCRIPTION PALLET QTY

MAXI/SBS/FILM MAXI TORCH SBS Film/Film Underlay 1m x 13m

## Maxi-Torch 3B Pour and Roll

#### **Product Finishes**



Sand Finish

- British Standard glass fibre based products
- Applied single-ply in certain systems

#### Typical specification

Maxi-Torch 3B is a waterproofing membrane, consisting of a glass fibre base coated with oxidised bitumen. It is sand finished on both surfaces. It is used as an economical underlay (or intermediate layer) in a built-up felt roofing specification, and usually fully bonded in hot bitumen. This product is also used as an underlay to bitumen shingles in a pitched roof application.

Roll weight: 40kg Roll length: 20m Roll width: 1m

PRODUCT CODE DESCRIPTION PALLET QTY

ETMT/3B/SAND MAXI TORCH 3B POUR AND ROLL SANDED 1m x 20mtr 25





## Guarantee on APP system

12

Capsheet: Maxi-Torch APP Premium Mineral **Underlay:** Maxi-Torch APP 4kg Universal Underlay or Maxi-Torch APP Unilay


Sanded Underlay

Venting Layer: D2000 Vent

Insulating Layer\*: Not provided by Easy-Trim Vapour Barrier\*: D2000 Vapour MLVB

\*Warm roof application only

Other products configurations are available but are not covered by an Easy-Trim guarantee.



## Guarantee on SBS system





Capsheet: Underlay:

Venting Layer: Insulating Layer\*: Vapour Barrier\*:

\*Warm roof application only Other products configurations are available but are not covered by an Easy-Trim guarantee.

Maxi-Torch SBS Premium Mineral Maxi-Torch SBS Film/Film Underlay or Maxi-Torch SBS Premilay Sanded Underlay D2000 Vent Not provided by Easy-Trim D2000 Vapour MLVB



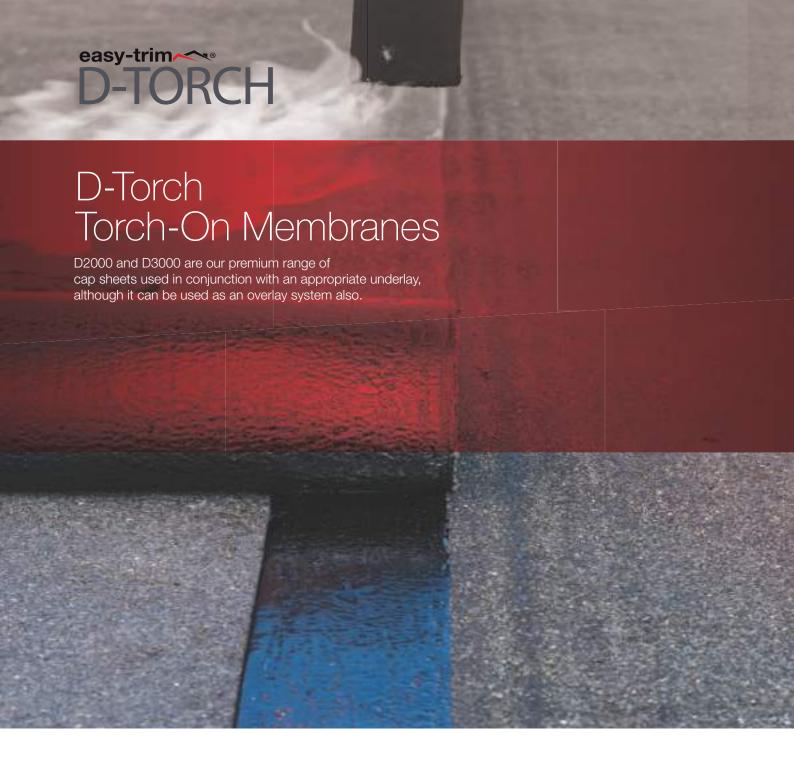

## **Applications**

D-Torch can be applied to most base materials:



CONCRETE



ASPHALT



EXISTING MEMBRANE



PLYWOOD



CORRUGATED METAL



## D2000 SBS Mineral

#### **Product Finishes**





Brindle Finish



Black Finish

**Material Upper Finish** Mineral **Underside Finish** PE Film

Colour Green Grey, Brindle & Black

**Dimensions** 1m x 8m

#### **Applications**

For internal side sanded, polymeric film, no-stick polymeric TNT: Flame of propane gas/ mechanical fixing. For internal side sanded: Hot adhesive, cold adhesive.

#### **Technical Data**


Watertightness EN 1928:2000(B) Pass (60 kPa) Maximum tensile strength Longitude/Transverse EN 12311-1 750/550 N/50mm Flexibility at low temperature EN 1109 ≤ -15°C

PRODUCT CODE DESCRIPTION PALLET QTY

D2000/SBS/GRN D2000 SBS MINERAL GREEN 25 D2000/SBS/BRI D2000 SBS MINERAL BRINDLE 25 D2000/SBS/BLK D2000 SBS MINERAL BLACK 25

## D2000 SBS GF3 Film/Film Underlay

#### **Product Finishes**



Black Finish

**Material Upper Finish** PE Film **Underside Finish** PE Film Colour Black **Dimensions** 1m x 8m

#### **Applications**

For internal side sanded, polymeric film, no-stick polymeric TNT: Flame of propane gas/ mechanical fixing. For internal side sanded: Hot adhesive, cold adhesive.

## **Technical Data**

Watertightness EN 1928:2000(B) Pass (60 kPa) Maximum tensile strength Longitude/Transverse EN 12311-1 300/200 N/50mm Flexibility at low temperature EN 1109 ≤ -15°C

PRODUCT CODE DESCRIPTION PALLET QTY

D2000/SBS/FILM D2000 SBS GF3 FILM/FILM UNDERLAY 28

## D2000 APP Unitec

#### **Product Finishes**



Sand Finish

**Material Upper Finish** Sand **Underside Finish** PE Film Colour Sand **Dimenasions** 1m x 16m

## **Applications**

For internal side sanded, polymeric film, no-stick polymeric TNT: Flame of propane gas/ mechanical fixing For internal side sanded: Hot adhesive, cold adhesive.

#### **Technical Data**

Watertightness EN 1928:2000(B) Pass (60 kPa) 300/200 N/50mm Maximum tensile strength Longitude/Transverse EN 12311-1 Flexibility at low temperature EN 1109 ≤ -5°C

PRODUCT CODE DESCRIPTION PALLET QTY D2000/APP/UNITEC D2000 APP UNITEC

28



## D2000 Vapour MLVB

#### **Product Finishes**



Sand Finish

Material Upper FinishSandUnderside FinishPE FilmColourSandDimensions1m x 10m

#### **Applications**

Flame of propane gas / mechanical fixing.

#### **Technical Data**

Watertightness EN 1928:2000(B) Pass (60 kPa) Maximum tensile strength Longitude/Transverse EN 12311-1 600/270 N/50mm Flexibility at low temperature EN 1109 ≤  $-15^{\circ}$ C

 PRODUCT CODE
 DESCRIPTION
 PALLET QTY

 D2000/SBS/MLVB
 D2000 VAPOUR MLVB FILM
 33

## D2000 Vent

#### **Product Finishes**



Black Finish

 Material Upper Finish
 PE Film

 Underside Finish
 PE Film

 Colour
 Black

 Dimensions
 1m x 30m

#### **Applications**

For internal side sanded, polymeric film, no-stick polymeric TNT: Flame of propane gas/mechanical fixing. For internal side sanded: Hot adhesive, cold adhesive.

#### **Technical Data**

Flexibility at low temperature EN 1109 ≤ -0°C

 PRODUCT CODE
 DESCRIPTION
 PALLET QTY

 D2000/APP/VENT
 D2000 VENT
 25





## D3000 SBS E-Flex Mineral

#### **Product Finishes**



Black Finish



Green Finish

**Material Upper Finish** Mineral **Underside Finish** PE Film Colour Black and Green **Dimensions** 1m x 6m

#### **Applications**

For internal side sanded, polymeric film, no-stick polymeric TNT: Flame of propane gas / mechanical fixing except single layer. For internal side sanded: Hot adhesive, cold adhesive.

#### **Technical Data**

Watertightness EN 1928:2000(B) Pass (60 kPa) Maximum tensile strength Longitude/Transverse EN 12311-1 850/650 N/50mm Flexibility at low temperature EN 1109 ≤ -15°C

PRODUCT CODE DESCRIPTION PALLET QTY D3000/SBS/BLK D3000 SBS E-FLEX MINERAL BLACK 25 D3000/SBS/GRN D3000 SBS E-FLEX MINERAL GREEN 25

## D3000 SBS Underlay

#### **Product Finishes**



Sand Finish

**Material Upper Finish** Sand. Glass Fibre Carrier

**Underside Finish** PE Film Colour Sand **Dimensions** 1m x 12m

#### **Applications**

For internal side sanded, polymeric film, no-stick polymeric TNT: Flame of propane gas / mechanical fixing. For internal side sanded: Hot adhesive, cold adhesive.

#### **Technical Data**

Watertightness EN 1928:2000(B) Pass (60 kPa) Maximum tensile strength Longitude/Transverse EN 12311-1 300/200 N/50mm Flexibility at low temperature EN 1109 ≤ -15°C

PRODUCT CODE DESCRIPTION PALLET QTY D3000/SBS/SAND D3000 SBS UNDERLAY 23



## Did you know?

We offer guarantees on the D-Torch range, giving clients complete peace of mind. For more information on the guarantees we can offer please see overleaf.

0845 034 6008

or email: technical@easy-trim.co.uk



## Guarantee on D2000 system

**YEARS** 

Capsheet: Underlay:

Venting Layer: Insulating Layer\*: Vapour Barrier\*:

\*Warm roof application only


Other products configurations are available but are not covered by an Easy-Trim guarantee.

D2000 SBS Mineral

D2000 SBS GF3 Film/Film Underlay or D2000 SBS GF3 Sanded Underlay

D2000 Vent

Not provided by Easy-Trim D2000 Vapour MLVB



## Guarantee on D3000 system

YEARS


Capsheet: Underlay: Venting Layer: Insulating Layer\*: Vapour Barrier\*:

\*Warm roof application only

Other products configurations are available but are not covered by an Easy-Trim guarantee.

D3000 E-Flex SBS Mineral D3000 SBS Underlay D2000 Vent

Not provided by Easy-Trim D2000 Vapour MLVB





## **Artificial Turf**

One of the latest trends quickly replacing natural grass, artificial grass allows for a more dynamic and easier way to maintain gardens and other outdoor areas. It requires very little attention and stays green all year round!

Luscious, dense, soft and tri-tone grass suitable for application in various situations it offers a realistic, aesthetically attractive appearance, touch and feel. Regardless of whether the outdoor area is well-used or purely for aesthetic purposes, artificial grass is ideal. For those who do not have any grass areas, then by using synthetic turf, these can be easily created adding a touch of greenery. Get the appearance of lush green grass without the hassle, it is completely maintenance free as there is no need to mow it or water it!



## Available in 3 lengths:







#### The benefits at a glance

- 10 year warranty
- 100% pet and child friendly
- Low maintenance
- Hard Wearing
- Durable
- Fully porous, meaning water will not collect on the surface
- Available in full rolls or cut sizes

PRODUCT CODE

DESCRIPTION

ET/EG/30/PRE ET/EG/32/PRE ET/EG/40/PRE EASY-TRIM PREMIUM 30MM GRASS EASY-TRIM PREMIUM 32MM GRASS EASY-TRIM PREMIUM 40MM GRASS

## Accessories

#### Turf-Fix

A single part adhesive for bonding the grass to hard surfaces.

- Simple one coat application
- Bonds well in wet or dry conditions
- Use to seam joints on artificial lawns
- Bonds to most substrates

PRODUCT CODE DESCRIPTION

ET/EG/ADH/C 310ML ADHESIVE CARTRIDGE (3M COVERAGE)

#### Turf-Tape

A 2-component polyurethane seam jointing adhesive for artificial grass, sport & play surfaces

- · Easy application
- Bonds well in wet or dry conditions
- Use to join artificial grass together

PRODUCT CODE DESCRIPTION

ET/EG/TAPE EASY-TRIM SEAMING TAPE (PER MTR)

ET/MEMBRANE WEED SURPRESSANT MEMBRANE (2M × 25M)

## Did you know?

Our new Artificial Turf Brochure and Sample Packs are now available. Call today to request your copy

Telephone: 0845 034 6008







#### ETR4

Centre pivot roof window in PVC or timber with or without electric radio control. Usage: from 15° to 90°



#### The benefits at a glance

- · Centre-pivot opening
- · Perfect alternative to place above ETR7 windows
- · Low emissivity double glazing
- · Optional thermal insulation system pre-fitted
- · Reserved for spaces that are difficult to access
- More safety for you: No mistakes, no stress and time-saving thanks to the clever push-fit system with audible click feedback
- Drive and control technology as standard: Convenient control in non-reachable areas
- Excellent prospects for you and your customers: German made Easy-Trim Roto quality – with a 15-year warranty
- Available in timber, painted timber and PVC

#### ETR6

Centre pivot roof window in PVC or timber with insulation collar.

Usage: from 15° to 90°



#### The benefits at a glance

- Extensive preassembly at the factory means faster installation
- Outstanding energy efficiency through integrated thermal insulation collar and triple insulating glazing: Roto blueTecPlus UW 0.80 W/m2K
- Professional installation with clear time savings thanks to Easy-Trim Roto closure systems

#### ETR7

Top-third pivot roof window in PVC or timber.

Usage: from 20° to 65°

#### The benefits at a glance

- Top-third opening
- Single handled operation at the bottom
- Low emissivity double glazing
- No obstructive sash and comfortable view
- · Optional thermal insulation system pre-fitted
- Available in timber, painted timber and PVC

#### ETR8

Top-hung roof window in PVC or timber with insulation collar.

Usage: from 20° to 65°



#### The benefits at a glance

- Low emissivity double or triple glazing
- · Easy and quick to fit, supplied fully assembled
- Panoramic unobstructed view and maximum headroom: maximum outward stepless opening of 45° hinged at the top of the window and at the convenience of the user
- More energy savings: Vapour barrier and pre-fitted insulation collar as standard for high thermal insulation and better air permeability
- Easy handling: One handle at the bottom of the sash for all functions (opening, ventilation and cleaning)
- Security: Four point central locking system and cleaning position locked to secure maintenance

## Why not upgrade?

You can upgrade to the ETRi8; intelligent motion fully electrical top pivot window with insulation collar

## Did you know?

Our comprehensive Easy-Trim Roto Brochure is now available. To request your copy please call today on 0845 034 6008 or email: marketing@easy-trim.co.uk




A wide selection of accessories (including blinds) are also available - please ask for details

## **Additional Support**

We appreciate that the roofing and construction industry can sometimes be complex but rest assured we are here to help. At Easy-Trim, we pride ourselves on our excellent customer service and technical advice which is available to support and guide you with any queries you may have, be that at the point of placing your order or during on-site installations.

We have a wealth of technical expertise and knowledge of the industry and products used day to day by all.




Across the whole of the Easy-Trim product range we provide comprehensive technical advice and support for our product applications to both specifiers and customers. We also offer technical training for some products via our approved contractor courses at our own training facilities in Rugby and Altham.

Wherever necessary we can assist with product selection advice, installation guidance and are happy to attend onsite where required.

## Contact our technical support today on 0845 034 6008





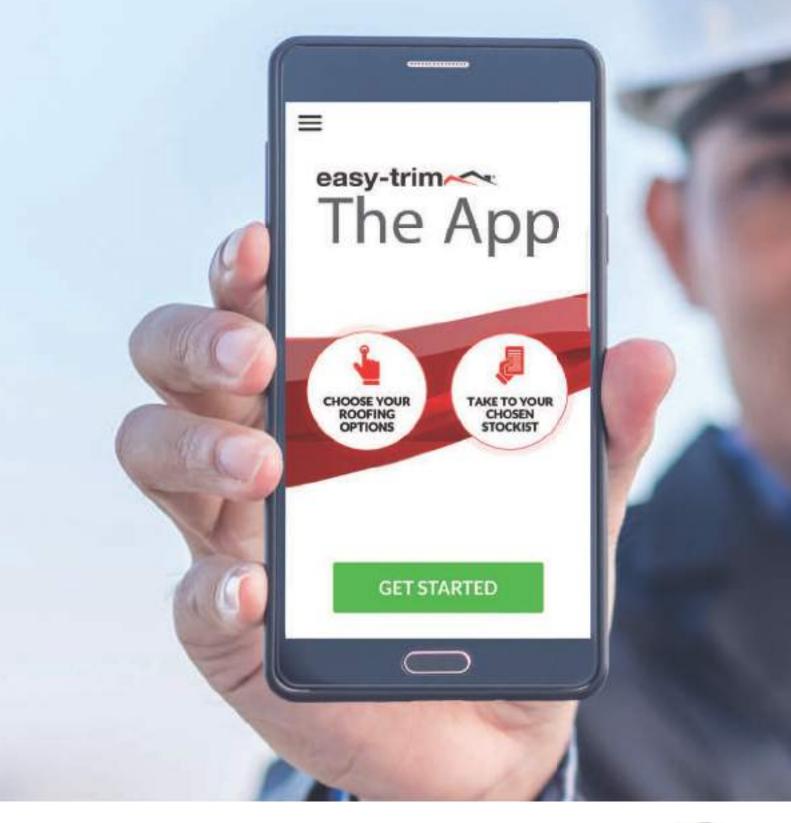

# Download Our New Essential Companion App



## Installer Hub

Manage your customer quotations through the Installer Hub



## Simplicity Warranty Companion

Manage specification and installation warranties with the Simplicity Warranty Companion



#### Flat Roofing Companion

Calculate your flat roofing material requirements, material build up and manage material sourcing



## News & Views Blog

Get up to date information, news and views live 24-7











## Delivery

Easy-Trim take great pride in the products we offer and how we present and deliver them to all our customers. We understand that our customers expect products to arrive on-time and in perfect condition, and we aim to meet those expectations with every delivery. Our dedicated distribution team take great care to collate and package your order and Easy-Trim has its own fleet of vehicles dedicated to providing our customers with the level of service they deserve and have come to expect.



## Our Responsibility

Easy-Trim is committed to minimise the impact of its activities on the environment and helping preserve our environment for future generations. Our environmental policy sets out how we aim to protect the environment and prevent the possibility of pollution. This process forms an integral part of every decision we make.

Whenever possible we aim to source our raw materials and packaging from the UK. Our packaging solutions have been overhauled to reduce the packaged volumes and our packaging materials are sourced locally and utilise Forest Stewardship council (FSC) 70 Mix Cardboard.

Waste PVC generated from within our manufacturing facilities is 100% recycled and converted into pelletised raw material at Easy-Trim Ecovyn, thereby avoiding landfill and any adverse environmental impact.

We provide clear information regarding the environmental impact of all our products on the Technical and Material Safety Data Sheets.









**tel:** 0845 034 6008 **fax:** 0845 034 6010

email: enquiries@easy-trim.co.uk

www.easy-trim.co.uk

Unit 12B Metcalf Drive | Altham Industrial Estate Altham | Lancashire | BB5 5TU | Great Britain







